

Wiha slim family.

The innovation for VDE fastening tools.



SoftFinish® electric



slimFix

See page 50 – 53

- Actuating tool for spring clips (wedge-profiled output geometry)
- Effortless access to low-lying fastening and spring elements



VDE exchange bit system



slimVario


See page 56 – 59



See page 54 – 55

Compact VDE bit sets:
holder + slimBit (length 75 mm)

- 35% lighter than comparable sets
- Maximum service life: metal locking mechanism
- Precise work – additional guidance with free-running sleeve

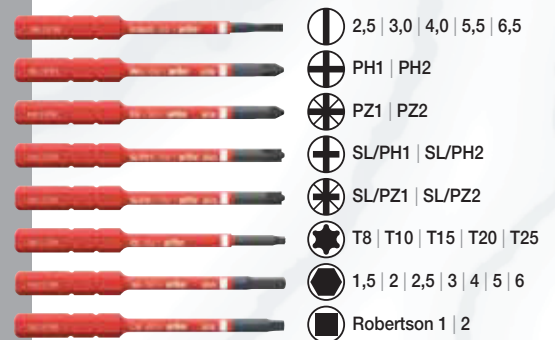

VDE torque system



slimTorque


See page 92 – 97

Controlled tightening of electrical screw connections with slimBits





- ⌀ 3,5 | 4,0 | 4,5 | 5,5 | 6,5
- ⊕ PH1 | PH2 ⊕ SL/PH1 | SL/PH2
- ⊗ PZ1 | PZ2 ◼ Robertson 1 | 2

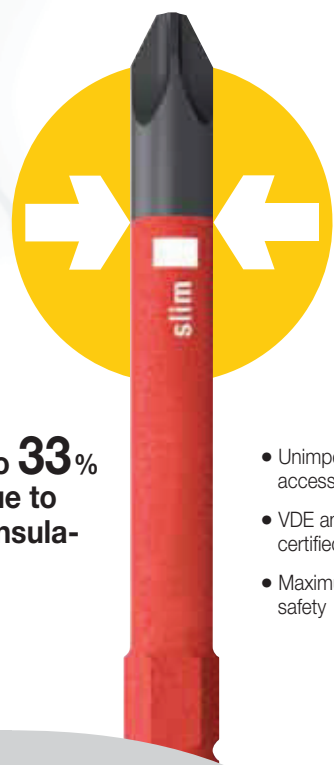

Blades up to **33%** narrower due to integrated insulation.

- Unimpeded accessibility
- VDE and GS certified
- Maximum safety

Plastic box



Bag



slim Selection Set




slimVario + slimTorque



Wiha slim selection set.

All-in-one.

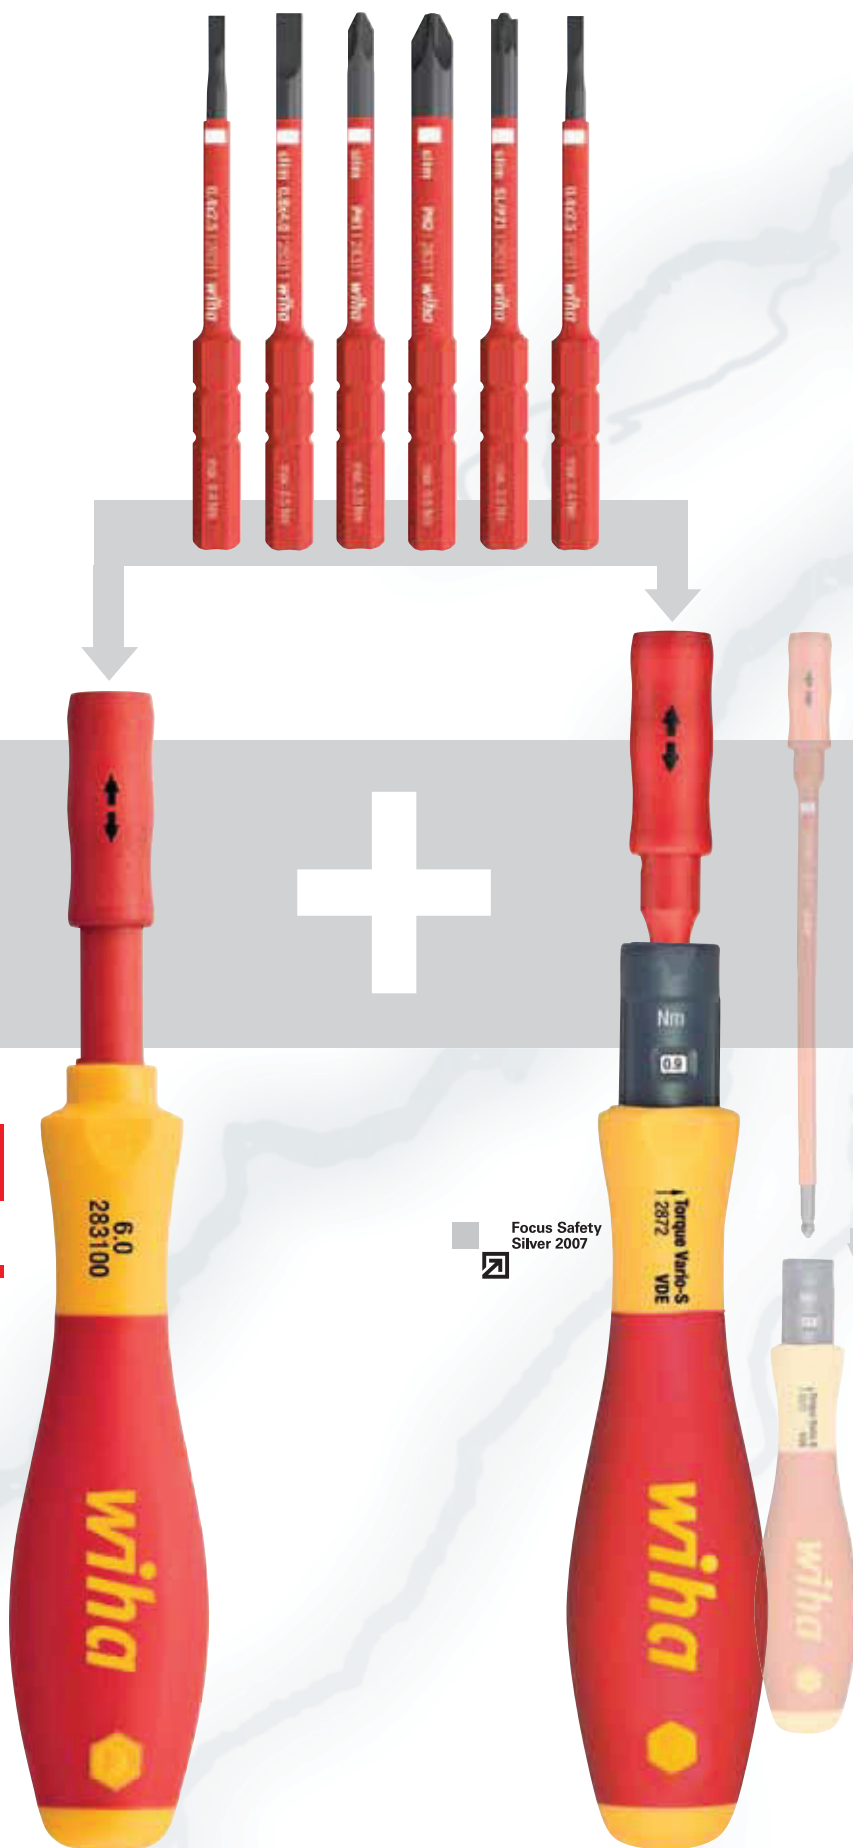


product
design
award
2011


 Focus Safety
Silver 2007

slimVario
VDE exchange bit system

slimTorque
VDE torque system



All
in one –
slim Selection!



See page 60

Wiha slimTECHNOLOGY :



slimVario

Compact VDE bit sets:
holder + slimBit (length 75 mm)

- 35% lighter than comparable sets
- Maximum service life: metal locking mechanism
- Precise work – additional guidance with free-running sleeve

slimTorque

Controlled tightening of electrical screw connections with slimBits

Wiha SoftFinish® electric slimFix.

The convenient slim solution for electrical applications.



product
design
award

2011



The right tool at a glance, thanks to the printed screw symbol on the handle end.


slimTECHNOLOGY



Applications on live equipment are subject to very special requirements. The focus is on absolute user safety and Wiha demonstrates this with a wealth of details.

The high quality blade insulation is moulded directly onto the blade and therefore guarantees safety when working on live equipment up to 1,500 V DC / 1,000 V AC. To maintain this safety, each screwdriver of the SoftFinish® electric series is individually tested in a water bath at 10,000 Volts according to IEC 60900:2012.

The roll-off protection and the special handle geometry offer optimum handling and electrical safety, even in critical applications.

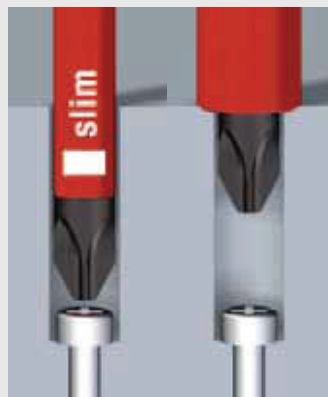

slimTECHNOLOGY:
Up to 33% reduction of the bit diameter in the critical working area allows effortless access to low-lying fastening/spring elements.



Wiha SoftFinish® electric slimFix.

- Unlimited access
- Blades up to 33% narrower due to integrated insulation
- Tool for spring clips (wedge-profiled output geometry)





Safety Notice:

When working with VDE tools, observe the national safety and accident prevention regulations!



For slotted, Phillips and Pozidriv screws.

For TORX®, terminal- and square-drive screws.



3201 SoftFinish® electric slimFix slotted screwdriver.
Individually tested protective insulation 1,000 V AC, VDE and GS tested.



3251 SoftFinish® electric slimFix TORX® screwdriver.
Individually tested protective insulation 1,000 V AC, VDE and GS tested.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, black-finish. Protective insulation moulded directly onto the blade and completely integrated into the blade in the lower area.

Blade: DIN ISO 8764. Manufactured acc. to IEC 60900:2012.

Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.

Application: The integrated protective insulation enables low-lying fastening and spring elements to be reached and manipulated.

Standards: DIN ISO 2380.

Smaller sizes from T9 contained in the 325 series.

Application: For all work on or around electrical components up to 1,000 V AC.

Extra: The integrated protective insulation enables low-lying fastening and spring elements to be reached and manipulated.

Order-No.	⊕	⊖	⊕	⊖	⊖
36536	T10	100	204	23	10
36537	T15	100	211	30	10
36538	T20	100	211	30	10
36539	T25	125	243	36	10
36540	T27	125	243	36	10
36541	T30	125	243	36	10
36542	T40	150	268	36	5

Order-No.	⊕	⊖	⊕	⊖	⊖	
35446	3.5	100	0.6	204	23	10
35390	4.0	100	0.8	211	30	10
35501	4.5	125	1.0	236	30	10
35391	5.5	125	1.0	243	36	10
35392	6.5	150	1.2	268	36	10



3271 SoftFinish® electric slimFix Xeno screwdriver.
For terminal screws (slotted/ Phillips).
Individually tested protective insulation 1,000 V AC, VDE and GS tested.

Blade: Manufactured acc. to IEC 60900:2012.

Order-No.	⊕	⊖	⊖	⊖	
35502	SL/PH1	80	191	30	10
35503	SL/PH2	100	218	36	10



3211 SoftFinish® electric slimFix Phillips screwdriver.
Individually tested protective insulation 1,000 V AC, VDE and GS tested.



3281 SoftFinish® electric slimFix Xeno screwdriver.
For terminal screws (slotted/ Pozidriv).
Individually tested protective insulation 1,000 V AC, VDE and GS tested.

Blade: Manufactured acc. to IEC 60900:2012.

Order-No.	⊕	⊖	⊖	⊖	
36329	SL/PZ1	80	191	30	10
36330	SL/PZ2	100	218	36	10

Order-No.	⊕	⊖	⊖	⊖	
35393	PH1	80	191	30	10
35394	PH2	100	218	36	10



3241 SoftFinish® electric slimFix Pozidriv screwdriver.
Individually tested protective insulation 1,000 V AC, VDE and GS tested.



3581 SoftFinish® electric slimFix square (Robertson) screwdrivers.
Individually tested protective insulation 1,000 V AC, VDE and GS tested.

Blade: Manufactured acc. to IEC 60900:2012.

Order-No.	⊕	⊖	⊖	⊖		
35504	Robertson 1	2.3	100	211	30	10
35505	Robertson 2	2.8	125	243	36	10

Order-No.	⊕	⊖	⊖	⊖	
35395	PZ1	80	191	30	10
35396	PZ2	100	218	36	10

Wiha SoftFinish® electric slimFix.

The convenient slim solution for electrical applications.

SoftFinish® electric slimFix sets.



SB 3201 S201 SoftFinish® electric slimFix slotted/ Phillips screwdriver set, 2-pcs. Individually tested protective insulation 1,000 V AC, VDE and GS tested.

Blister packed.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, black-finish.

Protective insulation moulded directly onto the blade and completely integrated into the blade in the lower area.

Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.

Standards: Manufactured acc. to IEC 60900:2012.

Application: For all work on or around electrical components up to 1,000 V AC.

Extra: The integrated protective insulation enables low-lying fastening and spring elements to be reached and manipulated.



Order-No.	Series	
36331	SB 3201 S201	1
⓪	3201	3.5x100
⊕	3211	PH2x100



SB 3201 S202 SoftFinish® electric slimFix slotted/ Pozidriv screwdriver set, 2-pcs. Individually tested protective insulation 1,000 V AC, VDE and GS tested.

Blister packed.

Order-No.	Series	
36332	SB 3201 S202	1
⓪	3201	3.5x100
⊕	3241	PZ2x100



SB 3201 S204 SoftFinish® electric slimFix slotted/ Xeno screwdriver set, 2-pcs. For terminal screws (slotted/ Pozidriv).

Individually tested protective insulation 1,000 V AC, VDE and GS tested.

Blister packed.

Order-No.	Series	
36333	SB 3201 S204	1
⓪	3201	3.5x100
⊕	3281	SL/PZ2x100



SoftFinish® electric slimFix sets.



3201 K6 SoftFinish® electric slimFix slotted/ Phillips screwdriver set, 6 pcs. Individually tested protective insulation 1,000 V AC, VDE and GS tested.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, black-finish.

Protective insulation moulded directly onto the blade and completely integrated into the blade in the lower area.

Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.

Standards: Manufactured acc. to IEC 60900:2012.

Application: For all work on or around electrical components up to 1,000 V AC.

Extra: The integrated protective insulation enables low-lying fastening and spring elements to be reached and manipulated.



Order-No.	Series	
35389	3201 K6	1
⓪	3201	3.5x100 4.0x100 5.5x125 6.5x150
⊕	3211	PH1x80 PH2x100



3201 ZK6 SoftFinish® electric slimFix slotted/ Pozidriv screwdriver set, 6-pcs. Individually tested protective insulation 1,000 V AC, VDE and GS tested.

Blade: Manufactured acc. to IEC 60900:2012.

Application: For all work on or around electrical components up to 1,000 V AC.

Extra: The integrated protective insulation enables low-lying fastening and spring elements to be reached and manipulated.



Order-No.	Series	
36455	3201 ZK6	1
⓪	3201	3.5x100 4.0x100 5.5x125 6.5x150
⊕	3241	PZ1x80 PZ2x100



SoftFinish® electric slimFix sets.



NEW
3201 K6 01



SoftFinish® electric slimFix slotted/Phillips/Pozidriv Xeno screwdriver set, 6-pcs.
Individually tested protective insulation 1,000 V AC, VDE and GS tested.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, black-finish.

Protective insulation moulded directly onto the blade and completely integrated into the blade in the lower area.

Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.

Standards: Manufactured acc. to IEC 60900:2012.

Application: For all work on or around electrical components up to 1,000 V AC.

Extra: The integrated protective insulation enables low-lying fastening and spring elements to be reached and manipulated.

Order-No.	Series					
38362	3201 K6 01					1
⓪	3201	3.5x100	4.0x100	5.5x125		
⊕	3211	PH1x80	PH2x100			
⊗	3281	SL/PZ2 x 100				



3251 K6

SoftFinish® electric slimFix TORX® screwdriver set, 6-pcs.
Individually tested protective insulation 1,000 V AC, VDE and GS tested.

Blade: Manufactured acc. to IEC 60900:2012.

Application: For all work on or around electrical components up to 1,000 V AC.

Extra: The integrated protective insulation enables low-lying fastening elements to be reached and manipulated.

Order-No.	Series					
36558	3251 K6					1
⊗	325	T8x60	T9x60			
⊗	3251	T10x100	T15x100	T20x100	T25x125	

Displays.



3211 VB

Display SoftFinish® electric slimFix.
Card display with 18 pcs.

Size: 28 x 13 x 36 cm (WxDxH).

Order-No.	Series					
35559	3211 VB					1
⓪	3201	3x3.5	3x4.0	3x5.5	3x6.5	
⊕	3211	3xPH1	3xPH2			



3241 VB

Display SoftFinish® electric slimFix.
Card display with 18 pcs.

Order-No.	Series					
35560	3241 VB					1
⓪	3201	3x3.5	3x4.0	3x5.5	3x6.5	
⊕	3241	3xPZ1	3xPZ2			

Wiha Magazine Bit Holder LiftUp electric.

With 6 slimBits.



A clever solution: 2 rockers pressed simultaneously unlock the bit depot



Turnable cap: Convenient way to add additional axial force




The magazine bit holder LiftUp electric is the latest development in the successful slimVario product line: a compact magazine bit holder which accommodates 6 common slimBits. This makes this tool the ideal companion for use on the move of any electrician.

Pressing both rockers extends the bit depot out of the magazine and provides all slimBits in a fanned-out presentation. Thus, removing and re-inserting individual slimBits is child's play. The proven ClicFix bit holder securely accommodates all the bits, locks them reliably and makes this tool a magazine which is suitable for universal use. The turnable cap is a further advantage. The required axial force can be built up by vigorously pressing the cap. The second hand is used to turn it along the longitudinal axis.

The magazine provides the maximum possible safety. In addition to the individually tested slimBits, the magazine is also completely VDE-GS certified. This means twice the safety for users.

In addition to their main application in the electrical field, these bits can also be used for mechanical fastening.

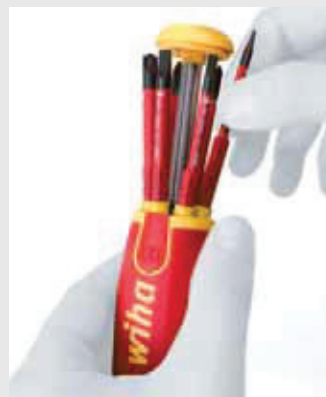

Each slimBit can be removed from the depot and re-inserted easily and conveniently



Wiha Magazine Bit Holder LiftUp electric.

- **Light and universal**
Ideal for use on the move
- **Does the job of 6 screwdrivers**
All common drives are always to hand
- **Turnable cap**
Convenient way to add additional axial force
- **Durable**
Internal metal construction ensures bit holder doesn't wear
- **Maximum safety:**
slimBit and magazine bit holder LiftUp electric are individually VDE-GS certified according to IEC 60900:2012

Safety Notice:

For work in the area of live parts up to 1,000 V AC! 6 mm VDE exchange bits should be used only with the hand-held screwdriver supplied! When working with VDE tools, observe the national safety and accident prevention regulations!





For slotted and Phillips screws.



NEW 1000 V
2831 09 020 Magazine Bit Holder LiftUp electric with 6 slimBits.
Doubled safety: slimBits and magazine are individually VDE-GS tested.

Blade: Chrome-vanadium steel, through-hardened.
 Insulation moulded directly onto blade.

Handle: Wiha SoftFinish® electric multi-component handle with roll-off protection.
 Internal magazine accommodates 6 common slimBits.
 Upon opening the magazine holder fans out enabling easy removal of slimBits.
 Turnable cap for comfortable handling.

Bit holder: Insulated metal ClicFix bit holder locks all slimBits reliability.
 Easily turnable guide sleeve provides support when fastening.
 Suitable for 6 mm slimBits only.

Application: Compact magazine screwdriver for electrical applications, especially for mobile applications.

Attention: Not for use with bit styles C 6.3 and E 6.3.

Order-No.	Series				
38610	2831 09 020	5			
	⓪ 2831-10	1x2.5	1x3.0	1x4.0	1x5.5
	⊕ 2831-11	1xPH1	1xPH2		

For slotted, Phillips and slotted/Pozidriv screws.



NEW 1000 V
2831 09 021 Magazine Bit Holder LiftUp electric with 6 slimBits.
Doubled safety: slimBits and magazine are individually VDE-GS tested.

Blade: Chrome-vanadium steel, through-hardened.
 Insulation moulded directly onto blade.

Handle: Wiha SoftFinish® electric multi-component handle with roll-off protection.
 Internal magazine accommodates 6 common slimBits.
 Upon opening the magazine holder fans out enabling easy removal of slimBits.
 Turnable cap for comfortable handling.

Bit holder: Insulated metal ClicFix bit holder locks all slimBits reliability.
 Easily turnable guide sleeve provides support when fastening.
 Suitable for 6 mm slimBits only.

Application: Compact magazine screwdriver for electrical applications, especially for mobile applications.

Attention: Not for use with bit styles C 6.3 and E 6.3.

Order-No.	Series			
38611	2831 09 021	5		
	⓪ 2831-10	1x3.0	1x4.0	1x5.5
	⊕ 2831-11	1xPH1	1xPH2	
	⊕ 2831-14	1xSL/PZ2		



NEW 1000 V
SB 2831 09 020 Magazine Bit Holder LiftUp electric with 6 slimBits.
Doubled safety: slimBits and magazine are individually VDE-GS tested.
Blister packed.

Order-No.	Series				
38612	SB 2831 09 020	5			
	⓪ 2831-10	1x2.5	1x3.0	1x4.0	1x5.5
	⊕ 2831-11	1xPH1	1xPH2		



NEW 1000 V
SB 2831 09 021 Magazine Bit Holder LiftUp electric with 6 slimBits.
Doubled safety: slimBits and magazine are individually VDE-GS tested.
Blister packed.

Order-No.	Series			
38613	SB 2831 09 021	5		
	⓪ 2831-10	1x3.0	1x4.0	1x5.5
	⊕ 2831-11	1xPH1	1xPH2	
	⊕ 2831-14	1xSL/PZ2		

Wiha Info



slimTECHNOLOGY:
 Up to 33% reduction of the blade diameter in the critical working area allows effortless access to low-lying fastening/ spring elements.



NEW 1000 V
2831 09 Magazine Bit Holder LiftUp electric, empty.
Can be filled with 6 slimBits.

Order-No.	Series	
38361		5

Wiha SoftFinish® electric slimVario.

Maximum safety at minimum size.



product
design
award

2011



slimTECHNOLOGY



The perfect combination of functional bits, handy holders and maximum safety standards! The Wiha slimBits and SoftFinish® hand-held screwdriver were especially developed for mobile applications at various locations, e.g. building sites, solar systems or external switch cabinets. Perfect for the job with its light weight and compact geometry.



Its slim design and especially the protective insulation integrated into the bit means highly diverse applications. It can be used both as a mechanical and electrical fastening tool. The bit holder manufactured from metal parts gives the tool a long service life and an unusual level of ruggedness for everyday use. Added to that is an assortment of commonly used exchange bits and the pleasant SoftFinish® handle.

For all those unwilling to compromise in terms of safety and comfort.



slimTECHNOLOGY:
Up to 33% reduction of the bit diameter in the critical working area allows effortless access to low-lying fastening/spring elements.

Safety Notice:

For work in the area of live parts up to 1,000 V AC! 6 mm VDE exchange bits should be used only with the hand-held screwdriver supplied! When working with VDE tools, observe the national safety and accident prevention regulations!



Wiha SoftFinish® electric slimVario.

- **Slim - light - mobile**
Ideal for taking along
- **Durable**
Internal metal construction ensures bit holder doesn't wear
- **Gets everywhere**
Even in small apertures and low-lying fastening and spring elements
- **A firm hold**
Optimal interplay of bit and holder
- **Certified quality**
GS mark for inspected safety, one-off testing in a water bath at 10,000 V according to IEC 60900:2012



Warning:

6 mm slimBits only to be used in the slimVario bit holder and slimTorque VDE bit holder (VDE torque system).



SoftFinish® electric slimVario. slimBits.



2831-00 SoftFinish® electric slimVario bit holder with handle and ClicFix, 6.0 mm.

Blade: Chrome-vanadium steel, through-hardened. Insulation moulded directly onto blade.
 Handle: Wiha SoftFinish® electric multi-component handle with roll-off protection.
 Bit holder: Insulated metal ClicFix bit holder locks all slimBits reliability. Only for 6 mm slimBits.
 Application: Compact screwdriver together with slimBits.
 Attention: Not for use with bit styles C 6.3 and E 6.3.

Order-No.	⊖	↔	⊕	⦿	max. Nm	⊖
34577	6	30	50	160	13	5



2831-10 SoftFinish® electric slimBit, slotted. Individually tested protective insulation 1,000 V AC, VDE and GS tested.

Standards: Manufactured acc. to IEC 60900:2012.
 Material: High-quality chrome vanadium steel, through-hardened, bronzed. Protective insulation moulded directly onto the bit and completely integrated into the blade in the lower area from size 4.0.
 Application: For all work on or around electrical components up to 1,000 V AC.
 Extra: The integrated protective insulation enables low-lying fastening and spring elements to be reached and manipulated. The slim form of the bit allows easy reaching of the screws below the finger and hand guards.
 Attention: 6 mm slimBits only to be used in the slimVario bit holder and slimTorque VDE bit holder (VDE torque system).

Order-No.	⊖	↔	⊕	⦿	max. Nm	⊖	
34578	2.5	75	0.4	6.0	0.4	no slim version	1
34579	3.0	75	0.5	6.0	0.6	no slim version	1
34580	4.0	75	0.8	6.0	2.5		1
34581	5.5	75	1.0	6.0	5.5		1
34582	6.5	75	1.2	6.0	5.5		1



2831-11 SoftFinish® electric slimBit, Phillips. Individually tested protective insulation 1,000 V AC, VDE and GS tested.

Order-No.	⊕	↔	⦿	max. Nm	⊖
34583	PH1	75	6.0	3.8	1
34584	PH2	75	6.0	5.5	1



2831-12 SoftFinish® electric slimBit, Pozidriv. Individually tested protective insulation 1,000 V AC, VDE and GS tested.

Order-No.	⊕	↔	⦿	max. Nm	⊖
34585	PZ1	75	6.0	3.8	1
34586	PZ2	75	6.0	5.5	1

slimBits.



2831-13 SoftFinish® electric slimBit, Xeno, for terminal screws (slotted/ Phillips). Individually tested protective insulation 1,000 V AC, VDE and GS tested.

Order-No.	⊕	↔	⦿	max. Nm	⊖
34587	SL/PH1	75	6.0	3.8	1
34588	SL/PH2	75	6.0	5.5	1



2831-14 SoftFinish® electric slimBit, Xeno, for terminal screws (slotted/Pozidriv). Individually tested protective insulation 1,000 V AC, VDE and GS tested.

Order-No.	⊕	↔	⦿	max. Nm	⊖
34589	SL/PZ1	75	6.0	3.8	1
34590	SL/PZ2	75	6.0	5.5	1



2831-15 SoftFinish® electric slimBit, TORX®. Individually tested protective insulation 1,000 V AC, VDE and GS tested.

Order-No.	⊕	↔	⦿	max. Nm	⊖	
35506	T8	75	6.0	1.3	no slim version	1
35507	T10	75	6.0	3.8	no slim version	1
35508	T15	75	6.0	5.0		1
35509	T20	75	6.0	5.5		1
36071	T25	75	6.0	5.5		1



2831-18 SoftFinish® electric slimBit, hexagon. Individually tested protective insulation 1,000 V AC, VDE and GS tested.

Standards: High-quality chrome vanadium steel, through-hardened, bronzed. Protective insulation moulded directly onto the bit and completely integrated into the blade in the lower area from size 2.5.

Order-No.	⦿	↔	⦿	max. Nm	⊖	
37222	1.5	75	6.0	0.9	no slim version	1
37223	2	75	6.0	1.8	no slim version	1
37224	2.5	75	6.0	3.8		1
37147	3	75	6.0	5.5		1
37225	4	75	6.0	5.5		1
37226	5	75	6.0	5.5		1
37227	6	75	6.0	5.5		1



2831-17 SoftFinish® electric slimBit, square (Robertson). Individually tested protective insulation 1,000 V AC, VDE and GS tested.

Order-No.	⦿	↔	⦿	max. Nm	⊖	
35510	Robertson 1	2.3	75	6.0	5.5	1
35511	Robertson 2	2.8	75	6.0	5.5	1

Wiha SoftFinish® electric slimVario.

Maximum safety at minimum size.

slimBit pack.



1000 V
IEC 60900:2012

2831 B601 slimBit pack, slotted/ Phillips, 6-pcs.

Bits: High-quality chrome vanadium steel, through-hardened, bronzed.
Protective insulation moulded directly onto the bit and completely integrated into the bit in the lower area.

Individually tested protective insulation 1,000 V AC, VDE and GS tested.

Application: For all work on or around electrical components up to 1,000 V AC.

Attention: 6 mm slimBits only to be used in the slimVario bit holder and slimTorque VDE bit holder (VDE torque system).

Order-No.	Series				
36088	2831 B601	1			
	⓪ 2831-10	1x2.5	1x3.0	1x4.0	1x5.5
	⊕ 2831-11	1xPH1	1xPH2		



1000 V
IEC 60900:2012

2831 B602 slimBit pack, slotted/ Pozidriv, 6-pcs.

Order-No.	Series				
36089	2831 B602	1			
	⓪ 2831-10	1x2.5	1x3.0	1x4.0	1x5.5
	⊕ 2831-12	1xPZ1	1xPZ2		



1000 V
IEC 60900:2012

2831 B603 slimBit pack, slotted/ Xeno (slotted/ Pozidriv), 6 pcs.

Order-No.	Series				
36090	2831 B603	1			
	⓪ 2831-10	1x2.5	1x3.0	1x4.0	1x5.5
	⊕ 2831-14	1xSL/PZ1	1xSL/PZ2		



NEW 2831 B701 slimBit pack, hex, 7-pcs.

Order-No.	Series				
38997	2831 B701	1			
	⦿ 2831-18	1x1.5	1x2	1x2.5	1x3
		1x4	1x5	1x6	

Sets.



1000 V
IEC 60900:2012

2831 T701 SoftFinish® electric slimVario starter pack, slotted/ Phillips, 7 pcs.

Bit holder: Insulated metal ClicFix bit holder locks all slimBits reliability.

Only for 6 mm slimBits.

Bits: High-quality chrome vanadium steel, through-hardened, bronzed.
Protective insulation moulded directly onto the bit and completely integrated into the bit in the lower area.

Individually tested protective insulation 1,000 V AC, VDE and GS tested.

Bit holder: Wiha SoftFinish® electric multi-component handle with roll-off protection.
Compact screwdriver together with slimBits.

Application: For all work on or around electrical components up to 1,000 V AC.

Extra: The integrated protective insulation enables low-lying fastening and spring elements to be reached and manipulated.
The slim form of the bit allows easy reaching of the screws below the finger and hand guards.

Order-No.	Series				
34733	2831 T701	1			
	⓪ 2831-10	1x3.0	1x4.0	1x5.5	1x6.5
	⊕ 2831-11	1xPH1	1xPH2		
	2831-00	1xSoftFinish® electric slimVario Bithalter			



1000 V
IEC 60900:2012

2831 T702 SoftFinish® electric slimVario starter pack, slotted/ Phillips, 7 pcs.

Order-No.	Series				
34734	2831 T702	1			
	⓪ 2831-10	1x2.5	1x3.0	1x4.0	1x5.5
	⊕ 2831-11	1xPH1	1xPH2		
	2831-00	1xSoftFinish® electric slimVario Bithalter			



1000 V
IEC 60900:2012

2831 T703 SoftFinish® electric slimVario starter pack, slotted/ Xeno (slotted/ Pozidriv), 7 pcs.

Order-No.	Series				
34735	2831 T703	1			
	⓪ 2831-10	1x3.0	1x4.0	1x5.5	1x6.5
	⊕ 2831-14	1xSL/PZ1	1xSL/PZ2		
	2831-00	1xSoftFinish® electric slimVario Bithalter			



Safety Notice:

When working with VDE tools, observe the national safety and accident prevention regulations!



slimVario display.

slimVario display.



2831 T701 VB Display SoftFinish® electric slimVario. Card display with 7 pcs.

Order-No.	Series				
35556	2831 T701 VB	1			
	⓪ 2831-10	1x3.0	1x4.0	1x5.5	1x6.5
	⊕ 2831-11	1xPH1	1xPH2		
	2831-00	1xSoftFinish® electric slimVario bit holder with handle			



NEW
2831 VB1 Display SoftFinish® electric slimVario. Acryl glass display with 60 pcs.

Size: 22 x 19 x 35 cm (WxDxH).

Order-No.	Series				
37057	2831 VB1	1			
	2831-00	3xSoftFinish® electric slimVario bit holder with handle			
	⓪ 2831-10	5x2.5	4x3.0	4x4.0	4x5.5
	⊕ 2831-11	4xPH1	4xPH2		
	⊗ 2831-12	4xPZ1	4xPHZ2		
	⊛ 2831-14	8xSL/PZ1	8xSL/PZ2		
	2831-15	4xT15	4xT20		



2831 T702 VB Display SoftFinish® electric slimVario. Card display with 7 pcs.

Order-No.	Series				
35557	2831 T702 VB	1			
	⓪ 2831-10	1x2.5	1x3.0	1x4.0	1x5.5
	⊕ 2831-11	1xPH1	1xPH2		
	2831-00	1xSoftFinish® electric slimVario Bithalter			



2831 T703 VB Display SoftFinish® electric slimVario. Card display with 7 pcs.

Order-No.	Series				
35558	2831 T703 VB	1			
	⓪ 2831-10	1x3.0	1x4.0	1x5.5	1x6.5
	⊗ 2831-14	1xSL/PZ1	1xSL/PZ2		
	2831-00	1xSoftFinish® electric slimVario Bithalter			



Blades up to **33%** narrower due to integrated insulation.

- Unlimited accessibility
- VDE and GS tested
- Maximum safety

Wiha SoftFinish® electric slimVario.

Maximum safety at minimum size.

SoftFinish® electric slimVario sets.



1000 V
IEC 60900:2012

2831 T704 slimVario starter set, 7-pcs.
Important slimBits in a bag.
Slotted/ Phillips.

Handle: Wiha SoftFinish® electric multi-component handle with roll-off protection.
Bit holder: Insulated metal ClicFix bit holder locks all slimBits reliability.
Only for 6 mm slimBits.

Bits: High-quality chrome vanadium steel, through-hardened, bronzed.
Protective insulation moulded directly onto the bit and completely integrated into the bit in the lower area.
Individually tested protective insulation 1,000 V AC, VDE and GS tested.

Application: For all work on or around electrical components up to 1,000 V AC.
Extra: Effortless access to low-lying fastening elements. Arranged clearly in a high quality, rugged and durable bag.

Order-No.	Series	
36069	2831 T704	1
	2831-00	1xSoftFinish® electric slimVario bit holder with handle
	⓪ 2831-10	1x2.5 1x3.0 1x4.0 1x5.5
	⊕ 2831-11	1xPH1 1xPH2



1000 V
IEC 60900:2012

2831 T705 slimVario starter set, 7-pcs.
Important slimBits in a bag.
Slotted/ Pozidriv.

Order-No.	Series	
36070	2831 T705	1
	2831-00	1xSoftFinish® electric slimVario bit holder with handle
	⓪ 2831-10	1x2.5 1x3.0 1x4.0 1x5.5
	⊕ 2831-12	1xPZ1 1xPZ2

2831 TL slimVario bag, empty.

Order-No.	Series	
36326	2831 TL	1



Safety Notice:

When working with VDE tools, observe the national safety and accident prevention regulations!

SoftFinish® electric slimVario sets.



1000 V
IEC 60900:2012

2831 T16 slimVario starter set, 16-pcs.
All commonly used slimBits in a bag.
Slotted/ Phillips/ Pozidriv/ Pozidriv Xeno/ TORX®.
Extra: Single-pole SoftFinish® voltage tester, 110-250 volts.

Order-No.	Series	
36068	2831 T16	1
	2831-00	1xSoftFinish® electric slimVario bit holder with handle
	⓪ 255-11L	1xSingle-pole voltage tester, 110-250 volts
	⓪ 2831-10	1x2.5 1x3.0 1x4.0 1x5.5
	⊕ 2831-11	1xPH1 1xPH2
	⊕ 2831-12	1xPZ1 1xPZ2
	⊕ 2831-14	1xSL/PZ1 1xSL/PZ2
	⊕ 2831-15	1xT10 1xT15 1xT20 1xT25



1000 V
IEC 60900:2012

2872 T10 slim selection set, 10-pcs.
VDE complete set with torque screwdriver, bit holder and slimBits.
Slotted/ Phillips/ Pozidriv.

Handle: VDE torque handle 1.0 - 5.0 Nm, steplessly adjustable.
Bit holder: Insulated metal ClicFix bit holder locks all slimBits reliability.
Only for 6 mm slimBits.
Bits: Protective insulation moulded directly onto the bit and completely integrated into the bit in the lower area.
Individually tested protective insulation 1,000 V AC, VDE and GS tested.
Application: For controlled fastening on live parts up to 1 000 V AC.
Extra: 100% safety from fastening with torque according to specification of manufacturer type-tested switching devices according to EN 60439-1.
Effortless access to low-lying fastening elements. Arranged clearly in a high quality, rugged and durable bag.

Order-No.	Series	
36078	2872 T10	1
	2872	1xTorqueVario®-S VDE, model 1.0-5.0 Nm
	2831-00	1xSoftFinish® electric slimVario bit holder with handle
	2879	1xslimTorque VDE bit holder for 6 mm slimBits
	285-900	1xTorque-Setter
	⓪ 2831-10	1x4.0 1x5.5
	⊕ 2831-11	1xPH1 1xPH2
	⊕ 2831-12	1xPZ1 1xPZ2

Wiha SoftFinish® electric.

The safe and comfortable insulated VDE screwdriver.



The right tool at a glance, thanks to the printed screw symbol on the handle end.



For slotted screws.



320N

SoftFinish® electric slotted screwdriver.

Individually tested protective insulation 1,000 V AC, VDE and GS tested.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, black-finish.

Insulation moulded directly onto blade.

Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.

Standards: DIN ISO 2380.

Manufactured acc. to IEC 60900:2012.

Application: For all work on or around electrical components up to 1,000 V AC.

Order-No.	⌀	↔	⊖	↔	↔	↔
00819	2.0	60	0.4	164	23	10
00820	2.5	75	0.4	179	23	10
00821	3.0	100	0.5	204	23	10
00822	3.5	100	0.6	204	23	10
00823	4.0	100	0.8	211	30	10
00824	4.5•	125	1.0	236	30	10
00825	4.5•	175	1.0	286	30	5
31863	4.5•	200	1.0	311	30	10
00826	5.5	125	1.0	243	36	10
00827	5.5•	175	1.0	293	36	5
00828	6.0•	150	1.2	268	36	10
00829	6.5	150	1.2	268	36	10
00830	8.0	175	1.2	299	41	10
00831	8.0	175	1.6	299	41	10
00832	10.0	200	1.6	324	41	10

• Additional dimension. Non-DIN size.



Wiha SoftFinish® electric.

- Safety when working with live equipment up to 1,000 V AC and 1,500 V DC
- Each screwdriver is individually tested in a water bath at 10,000 volts according to IEC 60900:2012
- Awarded the GS symbol for tested safety
- Multi-component SoftFinish® handle provides maximum user comfort

Applications on live equipment are subject to very special requirements. The focus is on absolute user safety and Wiha demonstrates this with a wealth of details.

The high quality blade insulation is moulded directly onto the blade and therefore guarantees safety when working on live equipment up to 1,500 V DC / 1,000 V AC. To maintain this safety, each screwdriver of the SoftFinish® electric series is individually tested in a water bath at 10,000 Volts according to IEC 60900:2012.

The roll-off protection and the special handle geometry offer optimum handling and electrical safety, even in critical applications.

Wiha SoftFinish[®] electric.

The safe and comfortable insulated VDE screwdriver.

For Phillips, Pozidriv and TORX[®] screws.



1000 V
IEC 60900:2012

321N SoftFinish[®] electric Phillips screwdriver.
Individually tested protective insulation
1,000 V AC, VDE and GS tested.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, black-finish.

Insulation moulded directly onto blade.

Handle: Ergonomic Wiha SoftFinish[®] multi-component handle with roll-off protection.

Standards: DIN ISO 8764. Manufactured acc. to IEC 60900:2012.

Application: For all work on or around electrical components up to 1,000 V AC.

Order-No.	PH0	PH1	PH2	PH3	PH4
00846	60	80	100	150	200
00847	164	191	218	268	318
00848	23	30	36	41	41
00849	10	10	10	10	5
00850	10	10	10	10	5



1000 V
IEC 60900:2012

324 SoftFinish[®] electric Pozidriv screwdriver.
Individually tested protective insulation
1,000 V AC, VDE and GS tested.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, black-finish.


Insulation moulded directly onto blade.

Handle: Ergonomic Wiha SoftFinish[®] multi-component handle with roll-off protection.

Standards: DIN ISO 8764. Manufactured acc. to IEC 60900:2012.

Application: For all work on or around electrical components up to 1,000 V AC.

Order-No.	PZ0	PZ1	PZ2	PZ3
00877	60	80	100	150
00878	164	191	218	324
00879	23	30	36	41
00880	10	10	10	5



1000 V
IEC 60900:2012

325 SoftFinish[®] electric TORX[®] screwdriver.
Individually tested protective insulation
1,000 V AC, VDE and GS tested.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, black-finish.

Insulation moulded directly onto blade.

Handle: Ergonomic Wiha SoftFinish[®] multi-component handle with roll-off protection.

Standards: Manufactured acc. to IEC 60900:2012.

Application: For all work on or around electrical components up to 1,000 V AC.

Extra: Sizes T10 to T40 are in the 3251 series with the slimFix screwdrivers.

Order-No.	T5	T6	T7	T8	T9
03760	60	60	60	60	60
03761	164	164	164	164	164
03762	23	23	23	23	23
00881	10	10	10	10	10
00882	10	10	10	10	10

For allen screws and internal square-drive screws.



1000 V
IEC 60900:2012

322 SoftFinish[®] electric hex nut driver.
Individually tested protective insulation
1,000 V AC, VDE and GS tested.

Blade: Chrome-vanadium steel, through hardened, black-finish.
Insulation moulded directly onto blade.

Deep drawn socket.

Handle: Ergonomic Wiha SoftFinish[®] multi-component handle with roll-off protection.

Standards: DIN 3125. Manufactured acc. to IEC 60900:2012.

Application: For external hex screws and hex nuts.

Order-No.	4	5	5.5	6	7	8	9	10	10	11	12	13	14	15	16	17
00853	125	125	125	125	125	125	125	125	125	125	125	125	125	125	125	125
00855	236	236	236	236	243	243	243	243	243	243	243	243	243	243	243	243
00856	30	30	30	30	36	36	36	36	36	41	41	41	41	41	41	41
00857	10.2	11.2	11.2	12.2	14.5	15.2	16.0	17.2	19.2	20.2	22.2	23.2	25.2	25.2	25.2	27.2
00858	10	10	10	10	10	10	10	10	5	5	5	5	5	5	5	5
00859	10	10	10	10	10	10	10	10	5	5	5	5	5	5	5	5
00860	10	10	10	10	10	10	10	10	5	5	5	5	5	5	5	5
00861	10	10	10	10	10	10	10	10	5	5	5	5	5	5	5	5
00862	10	10	10	10	10	10	10	10	5	5	5	5	5	5	5	5
00863	10	10	10	10	10	10	10	10	5	5	5	5	5	5	5	5
00864	10	10	10	10	10	10	10	10	5	5	5	5	5	5	5	5
00865	10	10	10	10	10	10	10	10	5	5	5	5	5	5	5	5
00866	10	10	10	10	10	10	10	10	5	5	5	5	5	5	5	5
00867	10	10	10	10	10	10	10	10	5	5	5	5	5	5	5	5
00868	10	10	10	10	10	10	10	10	5	5	5	5	5	5	5	5



1000 V
IEC 60900:2012

323N SoftFinish[®] electric hex screwdriver.
Individually tested protective insulation
1,000 V AC, VDE and GS tested.

Blade: Chrome-vanadium steel, through hardened, black-finish.
Insulation moulded directly onto blade.

Handle: Ergonomic Wiha SoftFinish[®] multi-component handle with roll-off protection.

Standards: Manufactured acc. to IEC 60900:2012.

Application: For allen screws.

Order-No.	2.5	3.0	4.0	5.0	6.0	8.0
30361	75	75	75	75	100	100
30362	179	179	186	186	218	218
30363	23	23	30	30	36	36
30364	10	10	10	10	10	10
30365	10	10	10	10	10	10
30366	10	10	10	10	10	10



1000 V
IEC 60900:2012

358N SoftFinish[®] electric square (Robertson) screwdriver.
Individually tested protective insulation
1,000 V AC, VDE and GS tested.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, black-finish. Insulation moulded directly onto blade.

Handle: Ergonomic Wiha SoftFinish[®] multi-component handle with roll-off protection.

Standards: Manufactured acc. to IEC 60900:2012.

Application: For fastening and unfastening internal square-drive (Robertson) screws.

Order-No.	Robertson 1	Robertson 2	2.3	2.8	100	211	30	36	10
32396	1	2	2.3	2.8	100	211	30	36	10
32397	1	2	2.3	2.8	100	211	30	36	10



Safety Notice:

When working with Wiha tools, observe the national safety and accident prevention regulations!



Slotted/ Phillips and slotted/ Pozidriv sets.



1000 V IEC 60900:2012

320N K6 SoftFinish® electric slotted/ Phillips screwdriver set, 6 pcs. Individually tested protective insulation 1,000 V AC, VDE and GS tested.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, black-finish. Insulation moulded directly onto blade.
Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.
Standards: Manufactured acc. to IEC 60900:2012.
Application: For all work on or around electrical components up to 1,000 V AC.

Order-No.	Series				
00833	320N K6				1
⓪	320N	3.0x100	4.0x100	5.5x125	6.5x150
⊕	321N	PH1x80	PH2x100		

Slotted/Phillips- and nut driver set.



1000 V IEC 60900:2012

320N K7 SoftFinish® electric slotted/ Phillips screwdriver set, 7 pcs. Individually tested protective insulation 1,000 V AC, VDE and GS tested.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, black-finish. Insulation moulded directly onto blade.
Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.
Standards: Manufactured acc. to IEC 60900:2012.
Application: For all work on or around electrical components up to 1,000 V AC.

with voltage tester

Order-No.	Series				
00834	320N K7				1
⓪	320N	2.5x75	4.0x100	5.5x125	6.5x150
⊕	321N	PH1x80	PH2x100		
⓪	255-11L	3.0x60			



1000 V IEC 60900:2012

320N ZK6 S0 SoftFinish® electric slotted/ Pozidriv screwdriver set, 6 pcs. Individually tested protective insulation 1,000 V AC, VDE and GS tested.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, black-finish. Insulation moulded directly onto blade.
Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.
Standards: Manufactured acc. to IEC 60900:2012.
Application: For all work on or around electrical components up to 1,000 V AC.

Order-No.	Series				
25477	320N ZK6 S0				1
⓪	320N	2.5x75	3.5x100	4.5x125	5.5x125
⊕	324	PZ1x80	PZ2x100		



1000 V IEC 60900:2012

322 K5 SoftFinish® electric hex nut driver set, 5 pcs. Individually tested protective insulation 1,000 V AC, VDE and GS tested.

Blade: Chrome-vanadium steel, through hardened, black-finish. Insulation moulded directly onto blade. Deep drawn socket.
Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.
Standards: Manufactured acc. to IEC 60900:2012.
Application: For all work on or around electrical components up to 1,000 V AC.

Order-No.	Series				
29466	322 K5				1
⓪	322	5.5x125	7x125	8x125	10x125
		13x125			



Wiha SoftFinish® electric Xeno.

For terminal screws.



The SoftFinish® electric Xeno screwdriver is a special VDE screwdriver used to turn terminal screws. Terminal screws are typically used in switch-cabinet systems and fuse boxes, terminal blocks and relays.

They have a special combination profile and are available as slotted/Phillips or slotted/Pozidriv models.

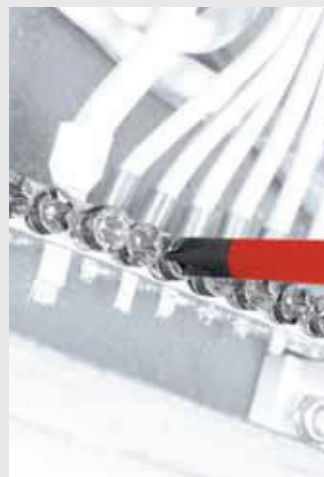

The Wiha SoftFinish® electric Xeno is ideally suited for work on switch cabinet systems, fuse boxes, terminal strips and relays.



Wiha SoftFinish® electric Xeno.

- The special slotted/ Phillips or slotted/ Pozidriv profile of the Xeno is optimally suited for terminal screws
- The combination profile reduces slipping and ensures greater torque transfer



Safety Notice:

When working with VDE tools, observe the national safety and accident prevention regulations!



For terminal screws (slotted/ Phillips).

For terminal screws (slotted/ Pozidriv).



327 SoftFinish® electric Xeno.

For terminal screws (slotted/ Phillips).
Individually tested protective insulation 1,000 V AC, VDE and GS tested.

328 SoftFinish® electric Xeno.

For terminal screws (slotted/ Pozidriv).
Individually tested protective insulation 1,000 V AC, VDE and GS tested.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, black-finish.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, black-finish.

Insulation moulded directly onto blade.

Insulation moulded directly onto blade.

Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.

Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.

Standards: Manufactured acc. to IEC 60900:2012.

Standards: Manufactured acc. to IEC 60900:2012.

Application: For all work on or around electrical components up to 1,000 V AC. No slipping and better torque transfer with terminal screws e.g. in switch-cabinets, fuse boxes and terminal blocks.

Application: For all work on or around electrical components up to 1,000 V AC. No slipping and better torque transfer with terminal screws e.g. in switch-cabinets, fuse boxes and terminal blocks.

Order-No.	⊕	↔	↔	↔	↔
30716	SL/PH1	80	191	30	10
30715	SL/PH2	100	218	36	10

Order-No.	⊕	↔	↔	↔	↔
30700	SL/PZ1	80	191	30	10
30701	SL/PZ2	100	218	36	10



SB 327 S2 SoftFinish® electric Xeno screwdriver set, 2 pcs.

For terminal screws (slotted/ Phillips).
Individually tested protective insulation 1,000 V AC, VDE and GS tested.

SB 328 S2 SoftFinish® electric Xeno screwdriver set, 2 pcs.

For terminal screws (slotted/ Pozidriv).
Individually tested protective insulation 1,000 V AC, VDE and GS tested.

Blister packed.

Blister packed.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, black-finish.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, black-finish.

Insulation moulded directly onto blade.

Protective insulation moulded directly onto the blade.

Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.

Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.

Standards: Manufactured acc. to IEC 60900:2012.

Standards: Manufactured acc. to IEC 60900:2012.

Application: For all work on or around electrical components up to 1,000 V AC.

Application: For all work on or around electrical components up to 1,000 V AC.

Order-No.	Series	↔
32281	SB 327 S2	1
⊕	327	SL/PH1x80 SL/PH2x100

Order-No.	Series	↔
32282	SB 328 S2	1
⊕	328	SL/PZ1x80 SL/PZ2x100

Wiha Topra 2K electric.

Pure power for electrical applications.



Finely serrated ratchet with 72 teeth enables 5° switching angle: guarantees precise work when things get tight.



The turbo wheel in use

The new Topra 2K electric pistol handle for electrical applications is especially advisable whenever large screwed connections have to be fastened. This is because the transmission of force can be axial when using a tool of this type due to its shape, and because the lever arm can be used to produce up to 20 Nm torque comfortably. This handle geometry is supported by a finely serrated ratchet with 72 teeth which enables a small switching angle of just 5°. In connection with the very low range of motion, all screwed connections (from the smallest to the largest) can be moved, even in extremely tight spaces.

The soft and hard zones are distributed across the handle according to the grip requirements of the hand and fingers in order to optimise the transmission of force to the handle. Thanks to the ergonomic design of this tool, it can be used to work with either a 2-finger grip or a hand clasp:

- **2-finger grip** when work has to be done quickly, e.g. when fastening long screws
- **Hand clasp** when the tightening or loosening requires increased torques.

Equipped with the special VDE blades, this tool fulfils the most demanding requirements of IEC 60900:2012



Wiha Topra 2K electric.

- **Powerful:**
Ergonomic pistol handle for high torques.
- **Without losses:**
Axial transmission of forces – without breakdown torque
- **Comfortable:**
Maximum transmission of force due to soft and hard zones which are adapted to the users palm
- **Fast:**
Finely serrated ratchet with 72 teeth enables 5° switching angle which works precisely when things get tight.
- **Innovative:**
Turbo wheel for fast turning of metal screws





Safety Notice:

When working with VDE tools, observe the national safety and accident prevention regulations!



Topra 2K electric pistol ratchet.



NEW
282700



Topra 2K electric pistol ratchet.

For individually tested VDE torque blades of the 28379 series.

- Blade: Designed for all blades of the 28379 series.
Positive locking secures all blades perfectly.
- Handle: Ergonomic pistol handle for high torques.
Axial power transmission without breakdown torque.
Maximum transmission of force due to soft and hard zones which are adapted to the users palm.
Finely serrated ratchet with 72 teeth enables 5° switching angle: guarantees precise work when things get tight.
Low range of motion for quick work, e.g. in 2-finger access.
Turbo wheel for extremely fast turning of metal screws and bolts.
- Application: Fast and powerful fastening even of larger screws, e.g. M8 and M10 in the area of live parts up to 1,000 V AC.

Order-No.	Ø	↔	↕	↔
39069	6.0	107	121	5

Topra 2K electric blades.



NEW
28379



Torque TR electric interchangeable blade, TORX®.
Individually tested protective insulation 1,000 V AC, VDE and GS tested.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, black-finish. Insulation moulded directly onto blade and completely integrated into the blade in the lower area.

Standards: Manufactured according to IEC 60900:2012.

Application: For all work on or around electrical components up to 1,000 V AC.

Order-No.	Symbol	Length	Width	Height	max. Nm	Blade
38931	T15	132	35	6.6	10	
38932	T20	132	35	13	10	
38933	T25	132	35	15	10	
38934	T27	132	35	15	10	
38935	T30	132	35	20	10	
38936	T40	132	35	20	10	



NEW
28379



Torque TR electric interchangeable blade, hex.
Individually tested protective insulation 1,000 V AC, VDE and GS tested.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, black-finish. Insulation moulded directly onto blade and completely integrated into the blade in the lower area.

Standards: Manufactured according to IEC 60900:2012.

Application: For all work on or around electrical components up to 1,000 V AC.

Order-No.	Symbol	Length	Width	Height	max. Nm	Blade
38918	3.0	132	35	5.5	10	
38919	4.0	132	35	15	10	
38920	5.0	132	35	20	10	
38921	6.0	132	35	20	10	



NEW
28379



Torque TR electric interchangeable blade, hex nut driver.
Individually tested protective insulation 1,000 V AC, VDE and GS tested.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, black-finish. Insulation moulded directly onto blade and completely integrated into the blade in the lower area.

Standards: Manufactured according to IEC 60900:2012.

Application: For all work on or around electrical components up to 1,000 V AC.

Order-No.	Symbol	Length	max. Nm	Blade
38925	7.0	132	5	10
38926	8.0	132	10	10
38927	9.0	132	14	10
38928	10.0	132	17	10
38929	13.0	132	20	10
38930	17.0	132	20	10

Wiha Classic electric.

The classic for electrical applications.



Safety Notice:
When working with VDE tools, observe the national safety and accident prevention regulations!

For slotted and Phillips screws.



320 Classic electric slotted screwdriver.
Individually tested protective insulation 1,000 V AC, VDE and GS tested.

Blade: Chrome-vanadium steel, through hardened, black-finish.
Insulation moulded directly onto blade.
Handle: Impact resistant Wiha Classic handle, resistant to chemicals and oils.
Standards: DIN ISO 2380. Manufactured acc. to IEC 60900:2012.
Application: For all work on or around electrical components up to 1,000 V AC.

Order-No.	⌀	↔	↔	↔	↔	↔
00782	1.6	40	0.4	115	19	10
00783	2.3	60	0.5	135	19	10
00784	2.5	75	0.4	150	19	10
00785	2.8	75	0.6	150	19	10
00786	3.0*	100	0.5	175	19	10
06568	3.0	150	0.5	225	19	10
00787	3.5	100	0.6	185	22	10
00788	3.5	100	0.8	185	22	10
00789	4.0	100	0.8	195	24	10
06569	4.0	150	0.8	245	24	10
00790	4.5	125	1.0	220	24	10
00791	4.5*	175	1.0	270	24	10
06570	5.0	100	1.0	195	24	10
06571	5.0	150	1.0	245	24	10
00792	5.5	125	1.0	230	28	10
00793	5.5*	175	1.0	280	28	10
06573	6.0	100	1.2	205	28	10
00794	6.0	150	1.2	255	28	10
00795	6.5	150	1.2	255	28	10
00796	8.0	175	1.2	290	32	10
00797	10.0	200	1.6	325	36	10

* Additional dimension. Non-DIN size.



321 Classic electric Phillips screwdriver.
Individually tested protective insulation 1,000 V AC, VDE and GS tested.

Blade: Chrome-vanadium steel, through hardened, black-finish.
Insulation moulded directly onto blade.
Handle: Impact resistant Wiha Classic handle, resistant to chemicals and oils.
Standards: DIN ISO 8764. Manufactured acc. to IEC 60900:2012.
Application: For all work on or around electrical components up to 1,000 V AC.

Order-No.	⊕	↔	↔	↔	↔
00836	PH0	60	135	19	10
00837	PH1	80	175	24	10
00838	PH2	100	205	28	10
00839	PH3	150	265	32	10
00840	PH4	200	325	36	10

VDE slotted/ Phillips sets.



320 K6 Classic electric slotted/Phillips screwdriver set, 6 pcs.
Individually tested protective insulation 1,000 V AC, VDE and GS tested.

Blade: Chrome-vanadium steel, through hardened, black-finish.
Insulation moulded directly onto blade.
Handle: Impact resistant Wiha Classic handle, resistant to chemicals and oils.
Standards: Manufactured acc. to IEC 60900:2012.
Application: For all work on or around electrical components up to 1,000 V AC.

Order-No.	Series				
00815	320 K6	1			
⌀	320	2.8x75	4.0x100	5.5x125	6.5x150
⊕	321	PH1x80	PH2x100		



320 P7 S0 Classic electric slotted/Phillips screwdriver set, 7 pcs.
Individually tested protective insulation 1,000 V AC, VDE and GS tested.


Blade: Chrome-vanadium steel, through hardened, black-finish.
Insulation moulded directly onto blade.
Handle: Impact resistant Wiha Classic handle, resistant to chemicals and oils.
Standards: Manufactured acc. to IEC 60900:2012.
Application: For all work on or around electrical components up to 1,000 V AC.

Order-No.	Series				
07151	320 P7 S0	1			
⌀	320	2.8x75	4.0x100	5.5x125	6.5x150
⊕	321	PH1x80	PH2x100		
⌀	255-3L	3.0x60			

with voltage tester

Wiha PicoFinish electric.

The VDE-GS tested precision screwdriver.



The smooth-running turn-cap enables fast turning.

Imprint with the screw symbol and sizes eases recognition.



Wiha PicoFinish electric.



NEW

2270P



VDE GS 1000 V IEC 60900:2012

PicoFinish electric slotted screwdriver.
Handle with rotating cap and rapid-turning zone.
Individually tested protective insulation
1,000 V AC, VDE and GS tested.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, black-finish. Insulation moulded directly onto blade.

Handle: Wiha PicoFinish handle for sensitive and fast screw fixing.

Standards: DIN ISO 2380. Manufactured acc. to IEC 60900:2012.

Application: For all work on or around electrical components up to 1,000 V AC.

Order-No.	⌀	↔	⊖	●	↔	↔	↔
38874	1.5	40	0.25	2.0	154	9	10
38875	2.0	60	0.4	2.0	160	18	10
38876	2.5	60	0.4	2.5	160	18	10
38877	3.0	60	0.5	3.0	160	18	10
38878	3.5	60	0.6	3.5	160	18	10



Wiha PicoFinish electric.

The new ergonomic Wiha PicoFinish electric precision screwdriver has protective insulation on the bronzed blade which is certified in accordance with VDE-GS and individually tested for breakdown in a water bath at 10,000 V. Because of this, this new family expands the application possibilities of VDE-GS tested fastening tools with tools for smaller screw sizes. These are necessary especially when settings should be made on live electrical or electronic components. Sensitive turning is particularly easy due to its octagonal profile at the beginning of the quick-turning zone.

A further advantage: This tool eliminates the risk of accidentally touching live parts with a blank blade and causing a short circuit.

- Ergonomic handle design with soft zone for comfortable work
- Through hardened, bronzed blade of chrome-vanadium-molybdenum steel for a long lifespan
- Protective insulation spray-coated directly onto the blade
- Safety when working with live equipment up to 1,000 V AC and 1,500 V DC
- Each screwdriver is individually tested in a water bath at 10,000 volts according to IEC 60900:2012
- Ideal for all fine and delicate work in electrical engineering and electronics



NEW

2271P



VDE GS 1000 V IEC 60900:2012

PicoFinish electric Philips screwdriver.
Handle with rotating cap and rapid-turning zone.
Individually tested protective insulation
1,000 V AC, VDE and GS tested.

Blade: DIN ISO 8764.

Order-No.	⊕	↔	●	↔	↔	↔
38879	PH00	60	2.0	154	9	10
38880	PH0	60	3.0	160	18	10
38881	PH1	60	4.0	160	18	10



NEW

2270P K6



VDE GS 1000 V IEC 60900:2012

PicoFinish electric slotted/Phillips screwdriver set, 6-pcs.
Individually tested protective insulation
1,000 V AC, VDE and GS tested.

Order-No.	Series				
38996	2270P K6	1			
⊖	2270P	1.5x40	2.0x60	2.5x60	3.0x60
⊕	2271P	PH00x60	PH0x60		

Wiha Volt Detector.

Testing pen for AC voltages.



The testing pen detects the phase and neutral conductor



Press down the clip, and the battery compartment locking mechanism opens



Wiha Volt Detector.

The Wiha Volt Detector is a measuring device to test the presence of AC voltage safely. For this purpose, the white tip is guided to the wire or contact to be tested. If the sensor detects AC voltage within a field of 4 mm, the red LED lights up immediately.

A particular advantage is that this test can be performed without having to disconnect or open cables, mains sockets, fuses, circuit breakers, junction boxes, etc.

A current flow through the user's body is not necessary for the reliable use of the testing pen. The power for operating the red LED is provided by 2 AAA batteries (LR03) that are included in the delivery

- Testing pen detects AC voltages from 230 to 1,000 V AC
- A bright red LED indicates AC voltages
- A current flow through the user's body is not necessary
- Complies with IEC 61010-1 safety standard: Measuring category CAT III 1,000 V
- CE compliant.

Volt Detector.



NEW
255-12



Volt Detector: Non-contact measuring voltage tester for AC voltages from 230 to 1,000 VAC.

- Scale: Bright red LED.
 Handle: Handy plastic housing with removable cap. Practical clip.
 Torque transducer: Protected under the white tip, the sensor provides non-contact recognition of AC voltages within a field of 4 mm.
 Standards: IEC 61010-1
 Measuring category: CAT III 1,000 VAC.
 Application: For determining AC voltages in the low voltage range between 230 and 1,000 VAC.
 Extra: 2 AAA batteries (LR03) are inserted in the voltage tester.

Order-No.	●!	↔	↔	↔
37871	4.2	149	39	10

NEW
SB 255-12



Volt Detector: Non-contact measuring voltage tester for AC voltages from 230 to 1,000 VAC.
Blister packed.

Order-No.	●!	↔	↔	↔
37872	4.2	149	39	5

Wiha single-pole voltage tester.

SoftFinish® voltage tester.



255-11 Single-pole SoftFinish® voltage tester, 110-250 volts.

In accordance with DIN 57680/-6 and VDE 0680-6, GS tested, CE compliant.

Blade: High-quality chrome-vanadium molybdenum steel, through-hardened, nickel-coated. Insulation moulded directly onto blade.

Handle: Ergonomic Wiha SoftFinish® handle of transparent, impact resistant plastic.

Metal contact plate and robust clip.

Standards: Blade tip DIN ISO 2380-1.

Application: For determining alternating voltages in low voltage range up to 250 volts with respect to earth potential.

Suitable for trade and industry professionals.

Extra: Tried-and-proven Wiha SoftFinish® screwdriver with additional testing function.

Global use is assured.

Order-No.	⌀	↔	⊖	↔	⊕	⊞
34745	3.0	60	0.5	140	19	10

SB 255-11 Single-pole SoftFinish® voltage tester 110-250 volts.

In accordance with DIN 57680/-6 and VDE 0680-6, GS tested, CE compliant. Blister packed.

Order-No.	⌀	↔	⊖	↔	⊕	⊞
35378	3.0	60	0.5	140	19	5

Wiha Info

Wiha SoftFinish® as single-pole voltage tester.

- High quality, hardened chrome-vanadium-molybdenum blade for perfect fastening
- Quality screwdriver in Wiha SoftFinish® design with testing function
- Voltage testing function with respect to earth potential from 110 to 250 V: worldwide use possible
- Rugged spring clip of non-rusting stainless steel
- Solid brass earthing contact
- VDE and GS tested
- CE compliant



Safety Notice:

When working with VDE tools, observe the national safety and accident prevention regulations!

Single-pole voltage tester.



255-2 Single-pole voltage tester, 220-250 volts.

In accordance with DIN 57680/-6 and VDE 0680-6, GS tested, CE compliant.

Blade: Chrome vanadium steel, through-hardened, nickel-coated.

Handle: Transparent.

Application: For determining alternating voltages in low voltage range up to 250 volts with respect to earth potential.

Suitable for trade and industry professionals.

Order-No.	⌀	↔	↔	⊕	⊞
05270	3.5	107	195	18	10

SB 255-2 Single-pole voltage tester 220-250 volts.

In accordance with DIN 57680/-6 and VDE 0680-6, GS tested, CE compliant.

Blister packed.

Order-No.	⌀	↔	↔	⊕	⊞
36517	3.5	107	195	18	5



255-3 Single-pole voltage tester, 220-250 volts.

In accordance with DIN 57680/-6 and VDE 0680-6, GS tested, CE compliant.

Blade: Chrome vanadium steel, through-hardened, nickel-coated.

Handle: Transparent with clip.

Application: For determining alternating voltages in low voltage range up to 250 volts with respect to earth potential.

Suitable for trade and industry professionals.

Order-No.	⌀	↔	↔	⊕	⊞
05271	3.0	60	140	15	10

SB 255-3 Single-pole voltage tester 220-250 volts.

In accordance with DIN 57680/-6 and VDE 0680-6, GS tested, CE compliant. Blister packed.

Order-No.	⌀	↔	↔	⊕	⊞
32201	3.0	60	140	15	1



255-7 Single-pole voltage tester, 150 - 250 volts.

In accordance with DIN 57680/-6 and VDE 0680-6, GS tested, CE compliant.

Blade: Chrome-vanadium steel, through hardened, black-finish.

Handle: Black with clip.

Application: For determining alternating voltages in low voltage range up to 250 volts with respect to earth potential.

Suitable for trade and industry professionals.

Order-No.	⌀	↔	↔	⊕	⊞
00456	3.0	60	160	17	10

SB 255-7 Single-pole voltage tester, 150 - 250 volts.

In accordance with DIN 57680/-6 and VDE 0680-6, GS tested, CE compliant. Blister packed.

Order-No.	⌀	↔	↔	⊕	⊞
31771	3.0	60	160	17	1